

**GLS BULB E27 806LM 8.6W 5000K NON-DIMM 220 FROSTED INTEGRAL**

ILGLSE27NF072



This 8.6W great all-purpose retrofit Integral LED Classic Globe (GLS) delivers a daylight output equivalent to 60W, offering big energy savings over equivalent incandescent bulbs. With a 806 lumen output and frosted finish this lamp is ideal for rooms with a single pendant fitting, living rooms, hallways and kitchens.

**Details**

<b>Quick Order Code:</b>	691431
<b>Barcode:</b>	5055788234166
<b>Category:</b>	Lamps
<b>Range Name:</b>	Everyday
<b>Product Type:</b>	GLS
<b>Market Segment:</b>	Commercial indoor, Residential indoor
<b>Warranty (Years):</b>	2
<b>CE RoHS:</b>	Yes

**Physical Data**

<b>Product Length (mm):</b>	106
<b>Product Weight (g):</b>	35
<b>Material:</b>	Plastic
<b>Base Term:</b>	Edison screw
<b>Bulb Base:</b>	E27
<b>Globe Type:</b>	GLS
<b>Bulb Fixing:</b>	Pendant, Wall, lamp stand, table lamp
<b>Bulb or Luminaire Shape:</b>	Round
<b>Placement / Application:</b>	Indoor, General Lighting

**Electrical Data**

<b>Power Consumption (W) :</b>	8.6
<b>Power Factor:</b>	0.5
<b>Wattage equivalent (W):</b>	60
<b>Amperage (mA):</b>	80
<b>Dimming:</b>	Non-Dimmable
<b>Driver Included:</b>	Yes
<b>Electric Current:</b>	AC
<b>True Wattage Eq (W):</b>	60


EN: EN-62560  
LVD Certified: Yes

## Light Data

Luminous Flux in Lumens (lm): 806  
Luminous efficacy (lm/W): 94  
Correlated Colour Temperature (CCT) (K): 5000  
Colour Temperature Name: Daylight  
Beam Angle: 220  
Colour Rendering Index (CRI): 80  
Frequency Range (Hz): 50  
Instant on (Less than 1 second): Yes  
Lifetime (hours): 15000  
Switching Cycles: 7500

## Environment

EN: EN-62560  
LVD Certified: Yes  
CE RoHS: Yes  
Previous Energy Rating: A+  
New Energy Rating: F  
Hg 0% (Mercury Free): Yes  
IP Rating (Ingress Protection): IP20  
Lowest Operating Temperature (°C): -20  
Maximum Operating Temperature (°C): 40

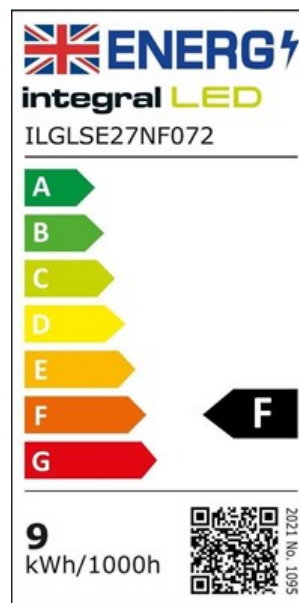

## Packaging

Package Weight (g): 55  
Package Length (mm): 65  
Package Width (mm): 65  
Package Depth (mm): 120  
Qty per euro pallet: 1200

[Portal.integral-led.com](http://Portal.integral-led.com)